


SPECIFICATIONS:

1. GENERAL:
 - 1.1 NUMERIC DISPLAY: 5-1/2 DIGIT, 7 SEGMENT, LCD
 - 1.2 16 SPECIAL ICONS FOR STATUS INDICATION
 - 1.3 GROSS/NET/TARE FEATURE
 - 1.4 ONE OR TWO FALL OPERATION
 - 1.5 BUZZER: 2900Hz
 - 1.6 SIX BUTTON KEYPAD
2. CONNECTIONS:
 - 2.1 POWER: 7-30 VDC
 - 2.2 CANBus DATA, FAULT PROTECTED
3. CONSTRUCTION:
 - 3.1 HOUSING MATERIAL: CELCON (ACETAL), PER UL 746C(f1)
 - 3.2 HARDWARE: STAINLESS STEEL AND BRASS
 - 3.3 LENS: 1/4" THICK POLYCARBONATE (LEXAN)
4. ENVIRONMENTAL:
 - 4.1 OPERATING TEMPERATURE: -30°C TO +75°C
 - 4.2 STORAGE TEMPERATURE: -40°C TO +85°C
 - 4.3 SEALING: IP67

REVISIONS			
REV	DESCRIPTION	APPROVED	DATE
A	INITIAL RELEASE	K CORPORON	03/04/11

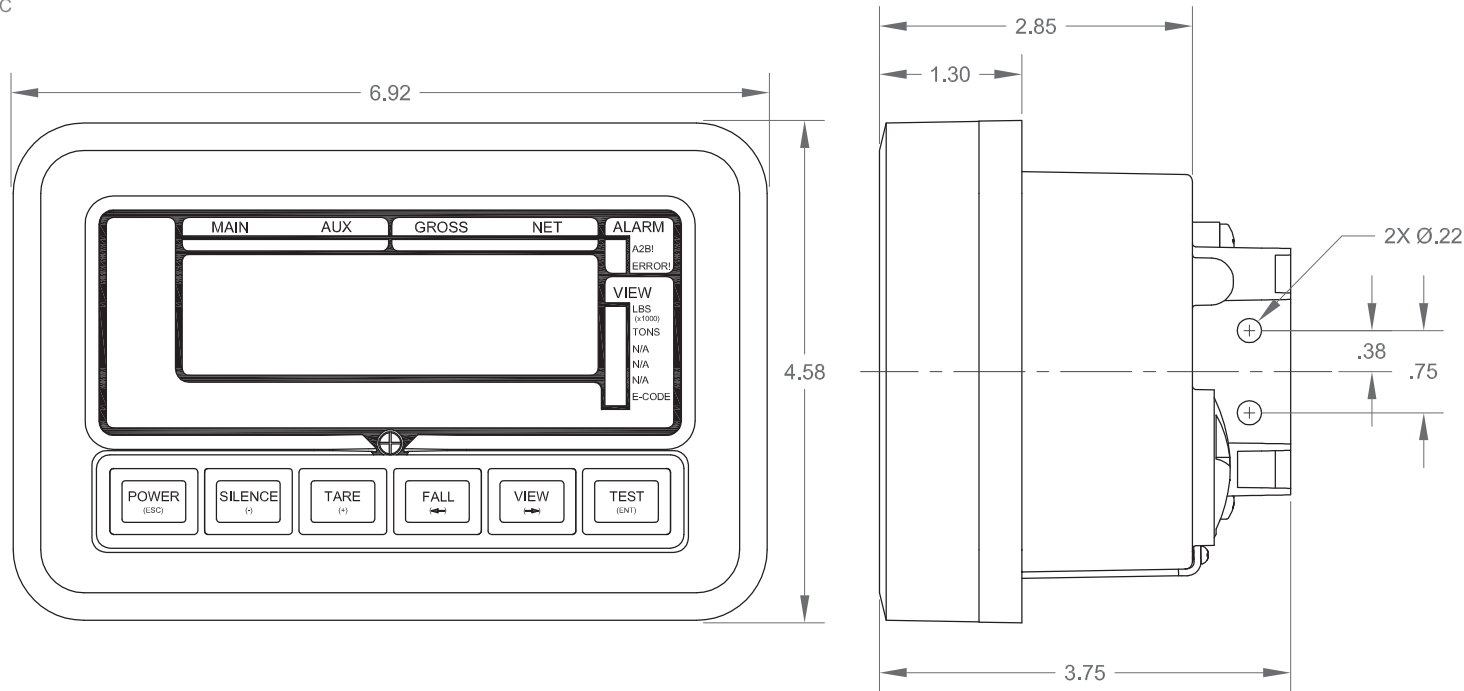


SPECIFICATION CONTROL DRAWING

EXPORT COMPLIANCE: TRANSFER OF 3PS DATA (DOCUMENTS, SOFTWARE, DRAWINGS, SPECS, ETC) BY ANY MEANS TO A FOREIGN PERSON OR ENTITY, WHETHER IN THE UNITED STATES OR ABROAD, MAY REQUIRE U.S. GOVERNMENT AUTHORIZATION.

© 2011 BY 3PS, INC
 THIS DOCUMENT MAY NOT BE COPIED OR REPRODUCED IN ANY WAY WITHOUT THE WRITTEN CONSENT OF 3PS, INC. 3PS, INC. OWNS ALL RIGHTS TO THIS WORK AND INTENDS TO ENFORCE ITS RIGHTS UNDER THE COPYRIGHT LAWS AS A PUBLISHED WORK.

THIRD ANGLE PROJECTION



TOLERANCES (UNLESS OTHERWISE SPECIFIED)
 HOLE: +.006
 -0.01
 DECIMAL: .XXX: ±.005
 DECIMAL: .XX: ±.01
 DECIMAL: .X: ±.1
 ANGLES: ±1°
 SURFACE: 125
 ROUGHNESS:

REMOVE ALL BURRS, BREAK SHARP EDGES R.015 MAX. INSIDE CORNER RADII .015 MAX.

DRAWN	J FILKINGTON	03/04/11
CHECKED	K CORPORON	03/04/11
RELEASED	K CORPORON	03/04/11

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES, MILLIMETERS IN BRACKETS.
 DIMENSIONAL LIMITS APPLY AFTER FINISH/PLATING.

MCCOY GLOBAL 1300 Arrow Point Dr. Cedar Park, TX

TITLE
DISPLAY, DIGITAL, 5-1/2 DIGIT, LCD, WIRELESS & CANBUS COMMUNICATION

SIZE	CAGE CODE	DRAWING NO.	REV
C	1MHK2	BGD01-CB002-0	A
SCALE	DO NOT SCALE DRAWING		SHEET
NONE			1 OF 1