
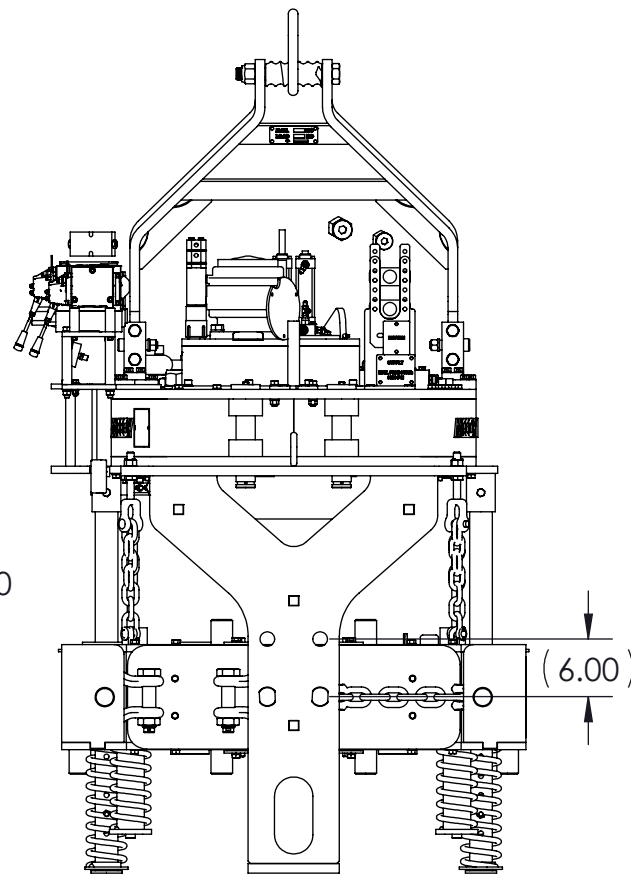


ITEM	QTY	P/N	DESCRIPTION
1	1	MK1475-7	KIT, MOUNTING, 14375-75K REMOTE
2	1	85-1004	ASSEMBLY, BACKUP, TENSION, 15
3	1	80-1001-33	ASSEMBLY, BU READY TONG, 14375-75K, RD-RB-RS
4	1	101-9363 / B	ASSEMBLY, KIT, PROXIMITY SENSOR BRACKETS

TONG SPECIFICATION		
MAX TORQUE (FT-LBS/N·M)	75,000	101,700
ARM LENGTH (INCH/CM)	49.5	125.7
MASS (LBS/KG)	6,500	2,951
TORQUE (FT LBS/N·M, ESTIMATED)		
AT PRESSURE (PSI/BAR):	2,450	169
Hi/Full	13,863	18,798
Lo/Full	75,000	101,700
SPEED (RPM, ESTIMATED)		
AT FLOW RATE (GPM/LPM):	60	227
Hi/Full	23.8	
Lo/Full	4.4	

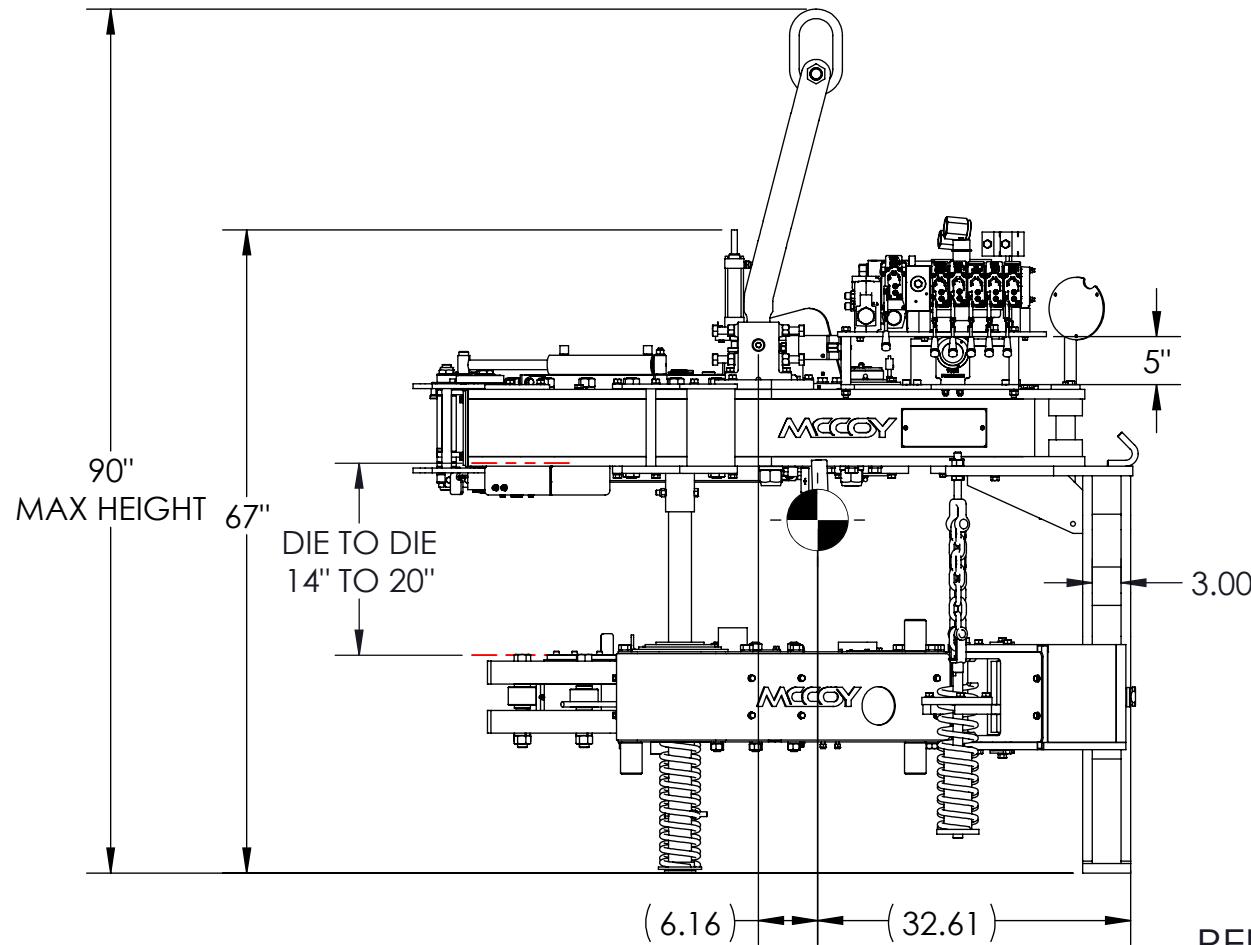

RELEASED FOR PRODUCTION

REVISIONS				
REVISION	ECO NUMBER	ECO DESCRIPTION	ECO COMPLETED BY	ECO COMPLETED DATE
B	ECN17-0159	ADDED 101-9363 (X1)	S. PANCHAL	7/18/2017
-	N/A	REMOVED TABLE	R. HENRY	1/18/2018

UNLESS OTHERWISE SPECIFIED:		PROPRIETARY STATEMENT		DESCRIPTION		
1. DIMENSIONS ARE IN INCHES	THIS DOCUMENT IS THE PROPERTY OF MCCOY CORPORATION AND IS CONSIDERED CONFIDENTIAL. THIS INFORMATION MAY NOT BE USED, DISCLOSED, COPIED, OR REPRODUCED IN ANY FORM, WITHOUT THE EXPRESS WRITTEN CONSENT OF MCCOY CORPORATION.			ASSEMBLY, TONG, 14375-75K X 15000 LJ BU, TENSION, RD-RB-RS		
2. TOLERANCES: ANGULAR ± 1° FRACTIONAL ± 1/16 TWO PLACE DECIMAL ± 0.02 THREE PLACE DECIMAL ± 0.005						
3. IDENTIFY P/N & MAIL P.O. USING 1/8 TO 1/4 ETCHED LETTERS; DENOTED BY "X"		DRAWN	S.PANCHAL	06/26/2017	SIZE PART NO. B 80-1001-32	
4. REMOVE BURRS & SHARP EDGES WITH 1/64x45° MAX		CHECKED	S.PANCHAL	06/26/2017		REV B
5. MACHINED FILET RADI SHALL BE 1/32		APPROVED	R.RAHMAN	06/26/2017		
6. FINAL SURFACE ROUGHNESS AVG. (Ra) SHALL BE ≤ 250 MICROINCHES		THIRD ANGLE PROJECTION		WEIGHT	6150.4 LBS.	
7. DIMENSIONS IN PARENTHESES ARE CRITICAL DIMENSIONS; 100% INSPECTION REQUIRED				MATERIAL	*	
8. A TRIANGLE DENOTES A REVISION				SHEET 1 OF 1		
9. INTERPRET DRAWING PER ASME Y14.5-2009						