

General:
SD50LT DAQ general purpose display

Electrical:

1. Power 8-30VDC
2. 500 ma Max

Construction:

1. Housing Material: Gray, Power-coated, 16-ga Steel
2. Lens 1/8" thick polycarbonate

Environmental:

1. Operating temperature -20°C to 65°C
2. Storage Temperature -20°C to 85°C
3. Customer must provide adequate environmental protection.
4. Caution: Safe area use only.

Mechanical:

1. Caution: Do Not operate, open or service when a Hazardous atmosphere is present.

REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	09/09/15	RH

D

C

B


A

D

C

B

A

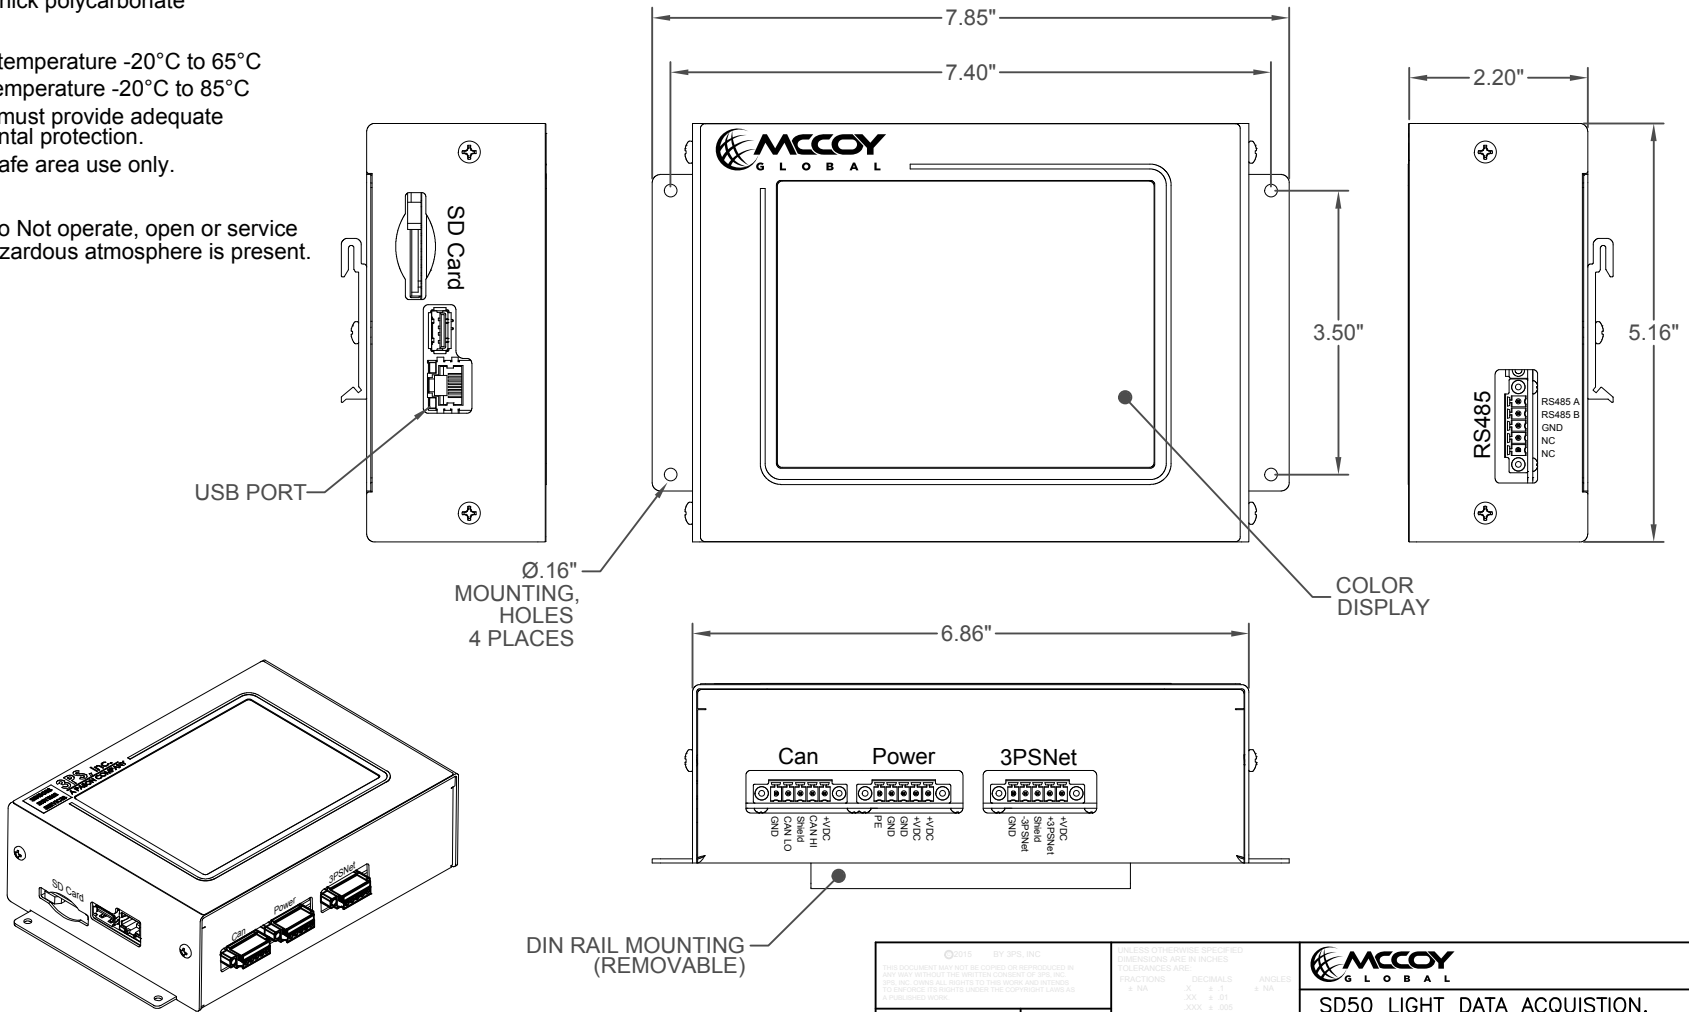

<p>APPROVALS</p> <table border="1"> <tr> <th>APPROVALS</th> <th>DATE</th> </tr> <tr> <td>DRAWN DP</td> <td>09/09/2015</td> </tr> <tr> <td>CHECK RC</td> <td>09/09/2015</td> </tr> <tr> <td>RELEASE DP</td> <td>09/09/2015</td> </tr> </table>		APPROVALS	DATE	DRAWN DP	09/09/2015	CHECK RC	09/09/2015	RELEASE DP	09/09/2015	<p>DATE</p> <table border="1"> <tr> <th>DATE</th> <th>APPROVED</th> </tr> <tr> <td>09/09/2015</td> <td>RH</td> </tr> </table>		DATE	APPROVED	09/09/2015	RH	<p>MATERIAL</p> <p>SEE NOTE</p>		<p>FINISH</p> <p>SEE NOTE</p>		<p>SD50 LIGHT DATA ACQUISITION, SPECIFICATION CONTROL DRAWING</p>	
APPROVALS	DATE																				
DRAWN DP	09/09/2015																				
CHECK RC	09/09/2015																				
RELEASE DP	09/09/2015																				
DATE	APPROVED																				
09/09/2015	RH																				
SIZE C	FSCM NO. 1MHK2	DWG NO. SD50LT-DAQ-001-0	REV A	SCALE N/A	SHEET 1 of 1																

4

3

2

1