

  
TOUGH. TESTED. RELIABLE.



McCoy Global products and services are subject to the Standard Terms and Conditions of Sale (or Rental) for McCoy Global Inc., both of which are available at [mccoyglobal.com](http://mccoyglobal.com).


For more information contact an authorized McCoy Global representative.

Unless noted otherwise, trademarks and service marks herein are the property of McCoy Global, Inc. Specifications are subject to change without notice. McCoy Global, Inc. All rights reserved. v18

[www.mccoyglobal.com](http://www.mccoyglobal.com) | [sales@mccoyglobal.com](mailto:sales@mccoyglobal.com)

  
TOUGH. TESTED. RELIABLE.

**weVERIFY II**  
TORQUE CALIBRATION  
BAR

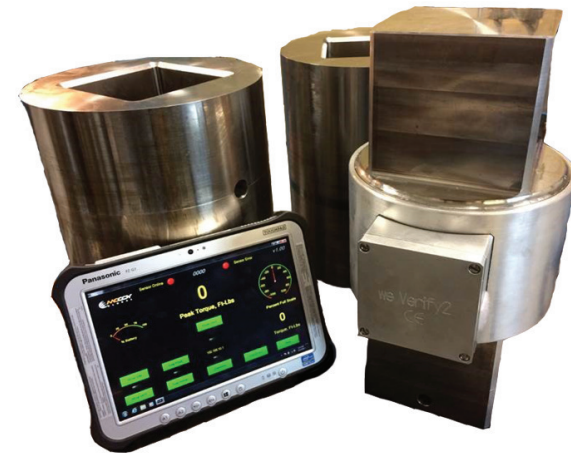

[www.mccoyglobal.com](http://www.mccoyglobal.com) | [sales@mccoyglobal.com](mailto:sales@mccoyglobal.com)




# weVERIFY II

## TORQUE CALIBRATION BAR

From the global market leader in well construction equipment for ensuring connection integrity, McCoy Global's weVERIFY II torque calibration bar and display is the solution for calibrating Bucking Units in non-hazardous environments.

When inaccurate torque is delivered by the bucking unit to your make-up connections it can cause damage to tubulars, dropped strings, leaks, and other connection failures that result in downtime in the critical path. You reduce the likelihood of all those things occurring if you check the torque delivery from your bucking unit on a regular basis.

The weVERIFY II provides improved accuracy in its calibration capability through its separating grip adapters from the sensors, removing the effects of irrelevant forces being applied to the sensors, and only transmitting torque forces. In addition, the gauging selection and application increases accuracy by now including eight discreet strain gauges placed at 45° and cross-wired to one another which reduces the effects of radial and bending forces impacting the torque reading.

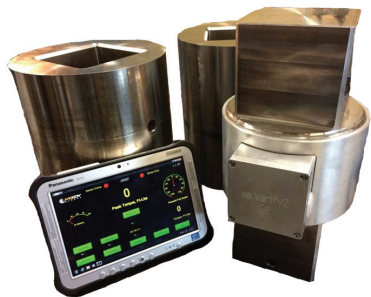

### BENEFITS

- Wireless wifi communication via a McCoy developed app that sends the data in real time as your bucking unit is being calibrated. The app can be installed on computers, laptops or tablets that operate with MS Windows
- Separate grip adapters mate with the square drive to minimize unwanted forces into the weVERIFY II sensor (unwanted forces can create measurement errors)
- Gauging selection and application reduces the effects of radial and bending forces impacting the torque reading
- Lighter weight by constructing the Sensor through a combination of high strength stainless steel and aluminum
- Battery power with off-the-shelf Alkaline AA cells including a magnetic on/off switch to aid battery life

### SPECIFICATIONS

#### TTR524-50K-4153

weVERIFY II, 50K, wifi

(Standard grip adapters are 7 5/8" OD with a total grip length of 32")

#### TTR524-100K-4153

weVERIFY II, 100K, wifi

(Standard grip adapters 9 5/8" OD with a total grip length of 32")

#### TTR524-150K-4171

weVERIFY II, 150K, wifi

(Standard grip adapters 10.75" with total grip length of 32")